Research Collection

Cupsinks & Drain Accessories

Cupsinks



0490-BE Black Epoxy 0490-GE Grey Epoxy 0490-PE Putty Epoxy 0490-SE Slate Epoxy Complete with removable strainer. 6"x 3" inside dimension. 11/2" I.P.S. male straight thread outlet. (Overall height is 71/2")



0491-BP Black Poly 0491-GP Grey Poly

Complete with removable strainer. $6^{\circ}x$ 3" inside dimension. $1^{1}/_{2}$ " I.P.S. male straight thread outlet. (Overall height is $8^{1}/_{2}$ ")



0492-BP Black Poly 0492-GP Grey Poly

Complete with removable strainer. $9^{*}x$ 3^{*} inside dimension. $1^{1}/2^{*}$ I.P.S. male straight thread outlet. (Overall height is 7^{*})



0493-BE Black Epoxy 0493-GE Grey Epoxy 0493-PE Putty Epoxy 0493-SE Slate Epoxy Complete with removable type 316 stainless steel wire screen. 13³/₈"x 4¹/₈" x 5¹/₄" I.D. 1¹/₂" I.P.S. male straight thread outlet. (Overall height is 8")

Stainless Steel Cupsinks




0950-0F Stainless Steel Made of type 304 stainless steel and has integral cross bars. 5" I.D. 1¹/2" I.P.S. male straight thread outlet.




0975-0F Stainless Steel Made of type 316 stainless steel and has integral cross bars. 6"x 3" I.D. 1¹/₂" I.P.S. male straight thread outlet.

Drain Accessories



0464-00 Polyethylene Trap and Sink Outlet Adjustable riser (tailpiece) can be cut to the desired length. Sink outlet is complete with plug strainer, gasket and locknut. Has a 11/2" I.P.S. male straight thread outlet. Running type trap can be used for either "P" or "S" type drain connections. 11/2" I.P.S. male straight thread outlet.



0469-00 Polyethylene Trap and Sink Outlet Adjustable riser (tailpiece) with 4¹/₂" adjustment that does not require cutting. The sink outlet is complete with plug, strainer, gasket and locknut. Has a 1¹/₂" I.P.S. male straight thread outlet. Trap is the bottle "P" type, with removable bottom for cleanout. 1¹/₂" I.P.S. male straight thread outlet.

St. Steel Sink Drain

Sink Outlet



0482-BP Black Poly 0482-GP Grey Poly

Complete with locknut. 1¹/2" I.P.S. male straight thread outlet. For use with epoxy resin tub sinks and troughs.



Sink Overflow

0494BP-04 4" High 0494BP-06 6" High 0494BP-08 8" High 0494BP-10 10" High Sink Overflows are designed to be used with 0482-BP sink outlets. 11/2" diameter.



0995-00 Stainless Steel Crumb Cup Strainer Complete with gaskets, locknut and basket strainer. 1¹/2" male straight thread outlet.




Research Collection

Kemresin Tub Sinks & Drain Troughs

Kemresin[®] Tub Sinks and Drain Troughs are made from a combination of modified epoxy resins, upgraded for maximum properties with carefully selected curing resins and inert fillers to produce a thermosetting material. They are formed in metal molds to provide one-piece units with coved corners and bottoms pitched to the drain outlet. After being removed from the molds, they are cured at high temperatures for several hours to complete the chemical reaction, and ensure maximum chemical, impact and thermal shock resistance. Drain outlets are sized for $1^{1}/2^{"}$ sink outlets unless otherwise specified.

Kemresin Drain Troughs are molded with no longitudinal joints. A slope of 1/8" per foot assures complete drainage, and a 7/8" cove radius in the bottom corners is provided for ease of cleaning. Five trough sections, or any part of them, are available to be cemented together to provide Open End Troughs up to 21' long, Closed End Troughs with an end drain outlet up to 21'-8" long and Closed End Troughs with a center drain outlet up to 42'-8" long. Section TR-4 is provided with a center drain recess for a standard 11/2" sink outlet.

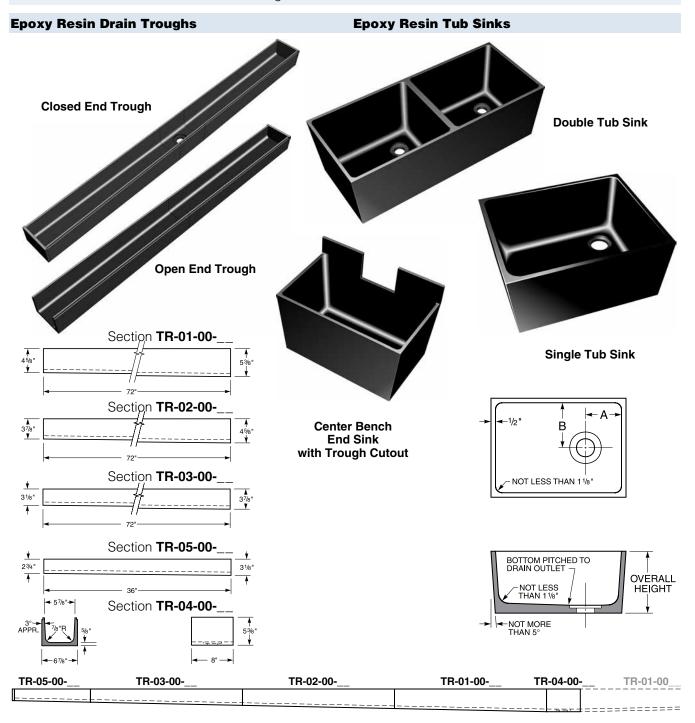

Kemresin Tub Sinks & Drain Troughs

Kemresin Colors

Kemresin[®] Tub Sinks and Drain Troughs are available in four standard colors: Black, Grey, Putty, and Slate.

To specify color, add color code to the end of the part number. **Example: 1005-00-BK**

Т

Color Codes

Inside Dimensions

BK	=	Black
GR	=	Grey

PT = Putty

SL = Slate

Drain

Kemresin Tub Sinks

			le Dimens Top of Si				
Catalog Number		Length	Width	Height	Α	в	Height
	1000-00	14"	10"	6"	4"	5"	61/8"
	1001-00	16"	8"	7"	4"	4"	8"
	1003-00	18"	15"	11 ¹³ ⁄16"	4"	4"	12 ⁷ ⁄8"
(1)	1003-DT	37"	15"	11"	4 ¹ /2"	4½"	12"
	1005-00	25"	15"	10"	4"	4"	11¼"
	1006-00	18"	15"	8"	4"	4"	9"
(2)	1006-DT	36¾"	15"	8¼"	4½"	41⁄2"	9"
	1007-00	24"	16"	8"	4"	8"	91/8"
	1008-00	16"	12"	8"	4"	6"	91⁄8"
	1011-00	18"	6½"	6"	9"	31⁄4"	7"
	1014-00	25"	15"	10"	4"	4"	111/4"
~ /	1015-00	233/8"	13 ³ /4"	13 ¹ /4"	11¹¹/16 "	9 ¹ /2"	17 ³ /4"
(5)	1016-00	23%"	13¾"	131⁄4"	11¹¹/ 16"	9½"	17¾"
<u> </u>	1021-00	16"	16"	7 ¹ /2"	4"	4"	8¾"
	1022-00	21"	18"	10"	4½"	9"	11"
	1023-00	211/2"	15½"	7"	4"	4"	8¾"
	1024-00	211/2"	151/2"	11"	4"	4"	12 ¹ /8"
(6)	1024-DT	44"	15½"	11"	4"	4"	12 ¹ /2"
	1025-00	28"	20"	9 ¹ /8"	14"	6"	10 ¹ /8"
	1026-00	351/2"	19½"	10"	173/4"	9 ³ /4"	111/8"
	1027-00	42"	20"	10"	21"	10"	11 ¹ ⁄4"
	1030-00	16"	12"	8"	8"	6"	9"
	1031-00	24"	16"	8"	12"	8"	9"
	1032-00	29 ³ /4" 21 ¹ /2"	14 ³ /4"	6"	14 ⁷ /8"	7 ³ /8"	7"
	1034-00		19 ¹ /4"	8"	103/4"	9 ⁵ ⁄8" 8 ³ ⁄4"	9 ¹ /8"
	1035-00	45 ³ ⁄4" 48 ⁵ ⁄8"	17¾" 24½"	12½" 5¾"	22 ⁷ /8" 3 ³ /4"	12 ¹ /4"	13¾" 6"
(7)	1036-00 1037-00-	48% 23¼"	24 % 14 1⁄4"	5% 12¾	3% 115%	9 ¹ /4"	ю 22 ³ ⁄8"
(7)	1037-00		ameter	75/8"		• / /	<u>22%</u> 8%"
` '	1038-00		ameter	8 ¹ /8"		nter nter	078 8 ⁷ /8"
(9)	SM-01-00-	12"	6"	6"	6"	3"	078 7"
	SM-02-00-	19 ¹ ⁄2"	16½"	8"	9 ³ ⁄4"	8 ¹ ⁄4"	9"
	SM-02-00	24"	21"	8"	6"	$4^{1/2}$ "	9 ¹ /8"
	SM-04-00-	251/2"	16 ¹ ⁄2"	19"	4 ¹ ⁄2"	4 /2 4 ¹ /2"	20 ¹ /8"
	SM-05-00	2372	18"	10"	4 /2	4 /2	2078 11 ¹ /8"
	SM-06-00-	28"	18"	10"	24"	4"	11 ¹ /8"
	SM-07-00-	30"	16"	10"	4"	4"	11½"
	SM-08-00	30"	16"	10"	26"	4"	11½"
	SM-09-00-	30"	18"	18"	4 ¹ /2"	4 ³ ⁄4"	18 ³ ⁄4"
	SM-10-00-	36"	21"	43/4"	472	4 74	5 ³ /4"
	SM-11-00-	48"	13"	12 ¹ /4"	24"		13 ¹ /4"
	SM-12-00-	8"	8"	8"	4"	4"	8 ⁷ ⁄8"

	Inside Dimensions (at Top of Sink)			Dr Loca	Overall Sink	
Catalog Number	Length	Width	Height	Α	в	Height
SM-13-00	14"	10"	8"	4"	5"	9"
SM-14-00	23 ¹ /4"	14¼"	12 ³ ⁄4"	115%"	9¼"	135⁄%"
SM-15-00	19 ³ ⁄4"	18"	24"	9 ⁷ ⁄8"	9"	25"
SM-16-00	40"	18"	18¼"	20"	9"	19 ¹ /4"
SM-17-00	293⁄4"	231⁄2"	6"	147⁄8"	11 ³ ⁄4"	7"
SM-18-00	18"	15"	15 ¹ ⁄4"	43⁄4"	4 ³ ⁄4"	16 ¹ ⁄2"
SM-19-00	351/2"	19½"	15 ³ ⁄8"	31⁄2"	4½"	16½"
SM-20-00	21"	18"	15¼"	4½"	4½"	16½"
SM-21-00	60 ¹ /2"	22"	7 ¹ /4"	6"	6"	8 ¹ ⁄8"
SM-22-00	24"	16"	15 ³ ⁄8"	12"	8"	16 ¹ /8"
SM-23-00	28"	18"	15½"	5½"	4"	16½"
SM-24-00	48"	8"	8"	24"	4"	9"
SM-25-00	21"	18"	151⁄8"	101⁄2"	9"	16 ¹ /8"
SM-26-00	21"	11¾"	151⁄8"	10½"	5 ¹¹ /16"	16 ¹ /8"
SM-27-00	36"	20"	16¼"	18"	10"	17 ¹ ⁄4"
SM-28-00	30"	18"	4 ¹ /8"	15"	9"	5 ¹ /4"
SM-29-00	36"	24"	12¼"	18"	12"	131⁄4"
SM-30-00	40"	30"	8 ¹ ⁄8"	20"	15"	9"
SM-31-00	24"	15¾""	12 ¹ ⁄8"	43⁄4"	8"	13"
SM-32-00	59"	21"	125⁄8"	291/2"	10½"	13¾"
SM-33-00	24"	18"	11"	4"	9"	11 ⁷ ⁄8"
(10) SM-34-00	15"	14"	101⁄2"	71⁄2"	7"	1111/4"
SM-35-00	51"	17"	12½"	251⁄2"	8½"	13¼"
SM-36-00	14"	10"	6"	7"	5"	6 ⁷ ⁄8"
(11) SM-37-00	24"	20"	105⁄/8"	6¾"	10"	1111/4"
SM-39-00	35	65⁄8"	43⁄4"	17½"	3 5⁄16"	5½"
SM-40-00	33 ³ ⁄8"	29 ¹ /8"	15 ³ ⁄4"	6"	14%16"	16 ¹ /2"
SM-41-00	18"	15"	8 ¹ /4"	9"	7 ¹ /2"	9"
SM-42-00	25"	15"	101/2"	12 ¹ /2"	71⁄2"	1111/4"
SM-43-00	21"	18"	10 ³ ⁄8"	10 ¹ /2"	9"	11 ¹ /8"
SM-44-00	36"	16"	11"	12"	4"	12"
SM-45-00	273/4"	143⁄4"	8½"	10 ¹ /2"	7 ¹ /2"	9¾"
SM-47-00	43"	15 ¹ /2"	11 ¹ /8"	21 ¹ /2"	7 ³ /4"	12"
SM-48-00	56"	24"	8 ¹ /4"	28"	12"	9"
SM-49-00	36"	16"	8 ³ ⁄8"	6"	8"	9"
<u>SM-50-00-</u>	24"	24"	12 ¹ /2"	12"	12"	13 ¹ /4"
SM-51-00	30"	157/8"	16 ³ /8"	6"	7 ¹⁵ /16"	171/8"
SM-52-00	45 ¹ /8"	111/2"	8 ¹ /8"	229/16"	5 ³ ⁄4"	9"
SM-53-00	31½"	16"	16 ¹ /2"	7 ¹ /8"	8"	17 ¹ /4"
<u>SM-55-00-</u>	16"	16"	123%"	$4^{1/4"}$	4 ¹ /4"	13"
SM-56-00	421⁄4"	181⁄8"	125⁄8"	211/8"	9 ¹ ⁄16"	13%"
		1	1			1

(1) Double tub sink. Distance between centerlines of drain outlets is $193/\!\!/ \mathrm{s}^{"}.$

(2) Double tub sink. Distance between centerlines of drain outlets is 19".

- (3) Sink has 71/8" long by 55/8" high trough cutout.
- (4) Center table end sink has 7¹/₈" long by 5⁵/₈" high trough cutout and 24¹/₂" long by 3³/₄" high back splash. Table side of sink is not tapered.
- (5) Center table end sink has 241/2" long by 33/4" high back splash without trough cutout. Table side of sink is not tapered.
- (6) Double tub sink. Distance between centerlines of drain outlets is 221/2".
- (7) Assembly of tub sink, back splash, ledge and end fillers. Used for T69W4525-00 Scrub Sink Assembly.
- (8) Cylindrical sink -12" inside diameter at top of sink with center drain outlet.
- (9) Cylindrical sink -18" inside diameter at top of sink with center drain outlet.
- (10) Sides have 11/2" taper per foot in height.
- (11) Exterior of one 21" long side is not tapered.

General Notes:

- Sinks with center drain outlets, except 1011-00, can be furnished with a drain recess sized for a crumb cup strainer or garbage disposal when specified.
- Any sink may be furnished with trough cutout. Specify location and size. (Trough location must be at least 11/2" from inside corner and 2" from bottom.)
- Most sinks can be joined together to form multiple tub sinks provided adjoining sides of sinks are the same size. Sinks longer than 30°, wider than 24° or deeper than 12° cannot be factory joined, but they can be factory prepared for field assembly. Assemblies of three or more tub sinks should be no longer than 60° overall. For longer assemblies, one factory joint can be made with a second joint prepared for field assembly.





Kemresin Drop-in Sinks

Kemresin Drop-in Sinks are formed in metal molds to provide a lipped onepiece tub with coved corners and bottoms pitched to the drain outlet. They are made from a combination of modified epoxy resins, upgraded for maximum properties with carefully selected curing resins and inert fillers to produce a thermosetting

material. After being removed from the molds, they are cured at high temperatures for several hours to complete the chemical reaction, and ensure maximum chemical, impact and thermal shock resistance. Drain outlets are sized for 11/2" sink outlets unless otherwise specified.

O.D.

Е

12¹/8"

181/4"

17³/16"

17¼"

171/8"

141/4"

8³/4"

181/4"

201⁄4"

13.6"

17.6"

171/4"

181/4"

101/4"

191⁄4"

173/4"

201/4"

145/8"

171/4"

18¹/4"

121/8"

171/4"

14¹/₄" diameter

201/4" diameter

D

16¹/8"

101/4"

20³/16"

271/4"

201/8"

181/4"

201/4"

181/4"

231/4"

17.6"

25.6"

301/4"

321⁄4"

14¹/4"

231/4"

233/4"

261⁄4"

191/2"

201/4"

261/4"

161⁄8"

271/4"

201/8"

They are designed to be mounted in Kemresin tops in a specially rabbetted cutout so that no support from below is required.

Drop-in Kemresin Sinks

Part Number

1000-DI-

1001-DI-

1003-DI-

1005-DI-

1006-DI-

1008-DI-

1011-DI-

1021-DI-

1022-DI-

1040-DI-

1041-DI-

1042-DI-

1043-DI-

1044-DI-

1045-DI-

1046-DI-

1047-DI-

1070-DI-

ADA Compliant 1000-ADA-DI-

1005-ADA-DI-

1006-ADA-DI-

(3) **1048-DI-**

(4) **1049-DI-**

(1)1038-DI-

(2) 1039-DI-



I.D.

17¹⁵/16"14¹⁵/16"

12" diameter

18" diameter

А

13⁷⁄8"

8"

25"

17⁷/8'

16"

18"

16"

21"

15%"

23³%"

28"

30"

12"

21"

211/2

24"

171/2

18"

24"

137/8"

25"

17⁷/8"

В

97/8"

16"

15"

147/8"

12"

 $6\frac{1}{2}$

16"

18"

113/8"

15%

15"

16"

8"

17"

15½"

18"

12³/8"

15"

16"

97/8""

15"

14⁷/8"

Depth

С

6" 7"

11"

10"

8"

8"

6"

71⁄2"

10"

75/8'

81/8"

8"

8.3"

11.8"

17.8"

6"

10"

11"

11"

61/2"


11"

15¹/2"

5"

4.8"

5"



Drain Location

Н

5 "

4"

31/2"

4"

31/2'

6"

31/4'

4"

9"

4'

4"

5"

8"

4"

81/2

4"

4"

5"

8"

4"

4"

31/2"

83/4" 63/16"

G

7 "

4"

31⁄2"

4"

31/2"

4"

9"

4"

4"

4"

4"

5"

5"

6"

4½"

4"

4"

4½"

12"


4"

4"


31⁄2"

center


center







1048-DI-



SECTION VIEW

1049-DI-

(1) Cylindrical sink, 12" inside diameter

17¹/8" (3) Triangular sink used in X92 and X94 assemblies (4) Stepped sink, 43/4" deep at front

(2) Cylindrical sink, 18" inside diameter

Kemresin Colors

Kemresin[®] Drop-in Sinks are available in four standard colors: Black, Grey, Putty, and Slate.

To specify color, add color code to the end of the part number. Example: 1005-DI-BK

Color Codes

BK = GR =	PT = SL =	,


Stainless Steel Drop-in Sinks

Seamless die-drawn from nickel bearing type 304, 18-8, 18 gauge stainless steel. Allows easy cleaning and stain resistance. Interior and top surfaces polished to a gleaming finish with a highlighted bowl rim. Corners and bottom turns are radiused 1³/4". Sinks are thoroughly sound deadened with environmentally safe compounds, to ensure proper sound insulation and to reduce condensation.

All sinks are self-rimming with stainless steel mounting channels for easy, top mount, snap-in clip installation. Sinks are compatible with any type worksurface material from 3/4" to 21/2" thick. Each sink is center punched to receive a standard cup strainer. ADA compliant sinks are punched in the center, 4-1/2" from the rear of the bowl for extra clearance.

Stainless Steel Sinks







	O.D.		Ι.	D.	
	Front	Side	Front	Side	
Part Number	to Back	to Side	to Back	to Side	Sink Depth
F-5353-08	15"	15"	12"	12"	71⁄2"
F-5354-08	17"	19"	14"	16"	7½"
F-5355-08	19"	22"	16"	19"	7 ¹ ⁄2"
F-5356-08	19"	25"	16"	22"	71⁄2"
F-5357-08	19"	31"	16"	28"	7 1⁄2"
F-5353-09	15"	15"	12"	12"	9"
F-5354-11	17"	19"	14"	16"	10½"
F-5355-11	19"	22"	16"	19"	10½"
F-5356-11	19"	25"	16"	22"	101⁄2"
F-5357-11	19"	31"	16"	28"	10½"
F-5354-12	17"	19"	14"	16"	12"
F-5355-12	19"	22"	16"	19"	12"
F-5356-12	19"	25"	16"	22"	12"
F-5357-12	19"	31"	16"	28"	12"

ADA Compliant

	O.D.		Ι.		
Part Number	Front to Back	Side to Side	Front to Back	Side to Side	Sink Depth
F-5353-06 F-5354-06 F-5355-06 F-5356-06 F-5357-06	15" 17" 19" 19" 19"	15" 19" 22" 25" 31"	12" 14" 16" 16" 16"	12" 16" 19" 22" 28"	5½" 5½" 5½" 5½" 5½" 5½"



Stainless Steel Sinks with Fixture Ledge

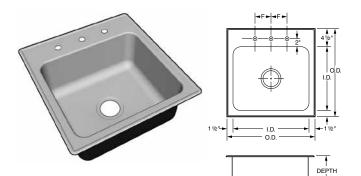

F O.D. I.D. Side Front Side Front Sink Depth Fixture Centers to Back to Back to Side to Side Part Number 71/2 F-5358-08 18" 15" 12" 12" 4" 14" 71/2" 6" F-5359-08 20" 19" 16" 22" 22" 71/2" 6" 16" 19" F-5360-08 22" 25" 22" 8" 8" F-5361-08 16" F-5362-08 22" 31" 16' 28" 71/2" 8" 18" 15" 12' 12" 9" 4" F-5358-09 6" F-5359-11 20" 19" 14" 16" 10¹/2" 6" 8" 8" 22" 22" 16" F-5360-11 19" 101/2" F-5361-11 25" 22' 16 22" 101/2" 31" F-5362-11 22 16' 28" 10¹/2" 22 22" 16' 19" 12" 6" F-5360-12 F-5361-12 12" 22" 25" 22" 8" 16" 12" 8" 22" F-5362-12 31" 16' 28"

ADA Compliant with Fixture Ledge

	0	O.D.		I.D.		F
Part Number	Front to Back	Side to Side	Front to Back	Side to Side	Sink Depth	Fixture Centers
F-5358-06 F-5359-06 F-5360-06 F-5361-06 F-5362-06	18" 20" 22" 22" 22"	15" 19" 22" 25" 31"	12" 14" 16" 16" 16"	12" 16" 19" 22" 28"	5 ¹ /2" 5 ¹ /2" 5 ¹ /2" 5 ¹ /2" 5 ¹ /2"	4" 6" 6" 8"

